Important

This Technical Data Sheet and the corresponding Installation Instructions provide important information to ensure the installed engine will operate according to the design specification in the Volvo Penta application for certification.

Requirements marked with ⚠ are considered as critical for exhaust emissions compliance according to the design specification in the Volvo Penta application for certification.

Failing to follow and meet these instructions and requirements when installing a certified engine in a piece of nonroad equipment for use in the United States violates U.S. federal law (40 CFR 1068.105(b)), subject to fines or other penalities as described in the Clean Air Act.

General

In-line four stroke diesel engine with direct injection. Rotation direction, anti-clockwise viewed towards flywheel

Number of cylinders			4
Displacement, total		liters	5,13
		in^3	313
Firing order			1-3-4-2
Bore		mm	110
		in	4,33
Stroke		mm	135
		in	5,31
Compression ratio			17.5:1
Wet weight (Not including after treatment system)	Engine only	kg	557
		lb	1228
	Power pac	kg	854
		lb	1883
	Power pac, compact cooling package	kg	776
		lb	1711

Performance				**rpm**	**1500**	**1800**	**2000**	**2200**
ICFN Power	129 kW	without fan		kW	126	129	129	129
				hp	171	175	175	175
		with fan 600 mm		kW	121	122	122	122
				hp	164	166	166	166
Torque at:		ICFN Power 129 kW		Nm	800	685	616	560
				lbf ft	590	505	454	413
Max torque at engine speed	ICFN Power		1400 rpm	Nm	810			
				lbf ft	597			
Power tolerance				%	±5			
Mean piston speed				m/s	6,8	8,1	9,0	9,9
				ft/sec	22,1	26,6	29,5	32,5
Effective mean pressure at:		ICFN Power 129 kW		MPa	1,96	1,68	1,51	1,37
				psi	285	243	219	199
Max combustion pressure at:		ICFN Power 129 kW		MPa	15	14,5	14	13,6
				psi	2175	2103	2030	1972
Total mass moment of inertia, J (mR^2) (not including flywheel)				kgm²	0,261			
				lbft²	6,2			
Friction Power				kW	13	18	23	29
				hp	18	24	31	39
Derating see Technical Diagrams								

Cold start performance

*Cold start limit temperature	without starting aid	°C °F	-15 5	
	with manifold heater 4 kW	°C °F	-25 -13	
	with manifold heater 4 kW and block heater	°C °F	-35 -31	
*Specify oil quality	Above -15°C; 15W40 Above -25°C; 10W30 Below -25°C; 5W30			
Block heater type	Make	Power kW	Engaged hours	Cooling water temp engine block
	Volvo	1,5		

* See also general section in the sales guide

Lubrication system

Lubricating oil consumption (average)		Vol%	0,05
Oil system capacity including filters		liter US gal	16 4,23
Oil sump capacity:	Max	liter US gal	14 3,57
	Min	liter US gal	10 2,51
Oil change intervals/specifications	VDS3, VDS4.5	h	500
	VDS3 with oil analysis	h	1000
Engine angularity limits:	front up	°	32
	front down	°	32
	side tilt	°	32
Oil pressure at rated speed		kPa psi	420 61

Lubrication system

Lubrication oil temperature in sump:	max	°C °F	125 257
Oil filtration efficiency (in accordance with ISO 4548-12)	97%	µ	36
	50%	µ	14

Fuel system		rpm	1500	1800	2000	2200
Fuel to conform to			EU EN590 US D975, 1-D and 2-D (Max 3000ppm sulphur and 7% FAME) For further information, see service bulletin 18-8-8			
System supply flow at max. speed		liter/h US gal/h	165 43,6			
Fuel supply line max. restriction (Measured at fuel inlet connection)		kPa psi	9 1,3			
Fuel supply line max. pressure, during engine stand still (meassured at fuel inlet connection)		kPa psi	20 2,9			
System return flow at max. speed		liter/h US gal/h	111,0 29,3			
Fuel return line max. restriction (Measured at fuel return connection)		kPa psi	10 1,5			
Max. allowable inlet fuel temp (Measured at fuel inlet connection)		°C °F	80 176			
Prefilter / Water separator filtration efficiency	99%	µ	30			
Main fuel filter filtration efficiency (in accordance with ISO 19438)	98%	µ	5			
	96%	µ	4			
Governor type/make, standard		Volvo / EMS 2.3				
Injection pump type/make		Denso HP3				

Intake and exhaust system		Inlet air temp	rpm	1500	1800	2000	2200
Charge air consumption at: (+25°C and 100kPa)	ICFN Power 129 kW	25°C	m³/min	9,3	10,8	11,6	12,6
		77°F	cfm	328	381	410	445
⚠ **See front page for important information** Max allowable air intake restriction including piping			kPa psi	6 0,9			
Heat rejection to exhaust at:	ICFN Power 129 kW		kW BTU/min	88 5004	95 5403	101 5744	110 6256
Exhaust gas temperature after turbine at:	ICFN Power 129 kW		°C °F	437 819	416 781	413 775	416 781
⚠ **See front page for important information** Max allowable back pressure in exhaust line (after turbine)			kPa	9	13	14	15
Pipe dimension Ø:	127 mm		psi	1,3	1,9	2,0	2,2
Exhaust gas flow at: (temp and pressure after turbine at the corresponding power setting)	ICFN Power 129 kW		m³/min	22,5	24,5	25,9	27,7
			cfm	795	865	915	978

Cooling system			rpm	1500	1800	2000	2200
Heat rejection radiation from engine at:		ICFN Power 129 kW	kW BTU/min	7 415	6 364	6,3 358	6,7 381
Heat rejection to coolant at:		ICFN Power 129 kW	kW BTU/min	61 3463	65 3674	68,6 3901	75 4265
Radiator cooling system type				Closed circuit			
Standard radiator core area		ICFN Power 129 kW	m² foot²	0,6 6,46			
Compact cooling package radiator core area		ICFN Power 129 kW	m² foot²	0,28 3,01			
Fan diameter	600 mm	ICFN Power 129 kW	mm in	600 23,62			
Maximum fan power consumption	600 mm pull		kW hp	5,1 7	7,2 10	7,2 10	7,2 10
Fan drive ratio	fan Ø600			1.4:1			
Coolant capacity:	engine		liter US gal	13 3,4			
	engine + standard radiator with hoses and expansion tank		liter US gal	47 12,4			
	engine + compact cooling package radiator with hoses and expansion tank		liter US gal	31 8,2			
Coolant pump			drive/ratio	belt/1,4:1			
Coolant flow with standard system			l/s US gal/s	5,4 1,4	6,5 1,7	7,2 1,9	8 2,1
Minimum coolant flow			l/s US gal/s				4,5 1,2
Maximum outer circuit restriction incl. piping			kPa psi	40,0 5,8			
Thermostat:		start to open	°C °F	85 185			
		fully open	°C °F	95 203			
Maximum static pressure head (expansion tank height + pressure cap setting)			kPa psi	110 16,0			
Minimum static pressure head (expansion tank height + pressure cap setting)			kPa psi	85 12,3			
Standard pressure cap setting			kPa psi	100 14,5			
Maximum top tank temperature			°C °F	107 225			
Recommended Draw down capacity. The difference between min coolant level in the expansion tank and the lowest level where the engine's coolant system still are functioning			liter	2			
			US gal	0,5			

Charge air cooler system		rpm	1500	1800	2000	2200
Heat rejection to charge air cooler	ICFN Power 129 kW	kW	24,8	27,7	29,6	32,8
		BTU/min	1410	1575	1683	1865
Charge air mass flow	ICFN Power 129 kW	kg/s	0,186	0,214	0,23	0,25
Charge air inlet temp.	ICFN Power 129 kW	°C	175	174	174	179
(Charge air temp after turbo compressor)		°F	347	345	345	354
⚠ **See front page for important information**						
Max allowable Charge air outlet temp.		°C	43	46	48	50
(Charge air temp after charge air cooler)		°F	109	115	118	122
⚠ **See front page for important information**						
Maximum pressure drop over charge air cooler incl. piping		kPa	6	8	10	12
		psi	0,9	1,2	1,5	1,7
Charge air pressure		kPa	190	192	186	185
(After charge air cooler)		psi	27,56	27,85	26,98	26,83
Standard charge air cooler core area		m²	0,5			
		foot²	5,38			
Compact charge air cooler core area		m²	0,22			
		foot²	2,37			

Cooling performance: 0,6 m² radiator and 600mm fan, pull

Cooling air flow and maximum additional external restriction at different radiator air temperatures based on 107°C TTT and 40% coolant. Valid at 1 atm.

				ICFN Power 129 kW			
Engine speed	Engine power	Air on temp		Air flow		External restriction	
rpm	kW hp	°C	°F	m^3/s	ft^3/s	Pa	psi
2200	129	79,8	176	7,3	257,8	0	
	175	79,3	175	7,2	254,3	100	0,015
		78,7	174	7	247,2	200	0,029
		77,4	171	6,6	233,1	300	0,044

Cooling performance: 0,28 m² radiator and 600mm fan, pull

Cooling air flow and maximum additional external restriction at different radiator air temperatures based on 107°C TTT and 40% coolant. Valid at 1 atm.

				ICFN Power 129 kW			
Engine speed	Engine power	Air on temp		Air flow		External restriction	
rpm	kW hp	°C	°F	m^3/s	ft^3/s	Pa	psi
2200	129	59	138	4,6	162,4	0	
	175	55,8	132	4,3	151,9	150	0,022
		51,7	125	4	141,3	300	0,044
		48,2	119	3,7	130,7	450	0,065

Engine management system

Functionality	Alternatives			Default setting
Governor mode	Droop	Isochronous		Isochronous
Governor droop	10	125	Nm/rpm	
Governor response	Adjustable PI constants			
Idle speed	600	900	rpm	700
Stop function				Replaced by "Ignition of stop engine"
Preheating function	Ignition	Request	Request + temp	If preheat is available, preheat will be active at ignition on if temp low or demanded by driver.
Lamp test				No lamp test, not used any longer
Ignition of stop engine	Yes	No		No

Engine sensors and switch settings			Alarm level		Engine protection	
Parameter		**Unit**	**Setting range**	**Default setting**	**Level**	**Action. Default/Alternative**
Oil temp		°C		125	125	Derate
Oil pressure	Low idle	kPa		150,0	150	Shut down
	Rated speed	kPa		300	300	Shut down
Coolant temp		°C		107	107	Derate
Coolant level				On	Low level	Derate
Water in fuel			On if closed circuit			
Air filter pressure drop				5kPa		
Altitude, above sea		m				Automatic derating, see section derating
Charge air temp		°C		80	80	Derate
Charge air pressure		kPa		See map		Derate
Engine speed		rpm				Shut down. ON/OFF*

* Off means no shut down, alarm only

Parameter	Warning	Alarm	Derated 0% to engine protection map	Derated 100% to engine protection map	Forced idle after 0 sec	Forced shut down after 0 sec
Coolant temp	103°C	107°C	107°C	110°C		
Oil temp	122°C	125°C	125°C	130°C		
Low oil pressure	Warning map value	Alarm map value		Alarm map value		
High charge air temp	77°C	80°C	80°C	100°C		
High charge air pressure		Alarm map value	Alarm map value			

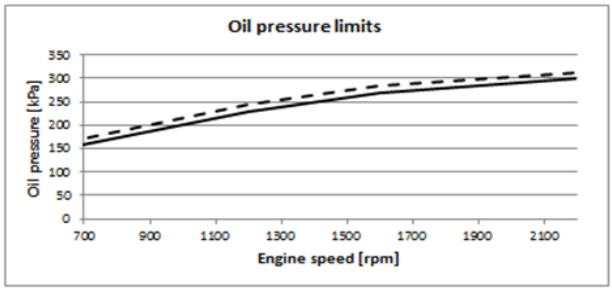

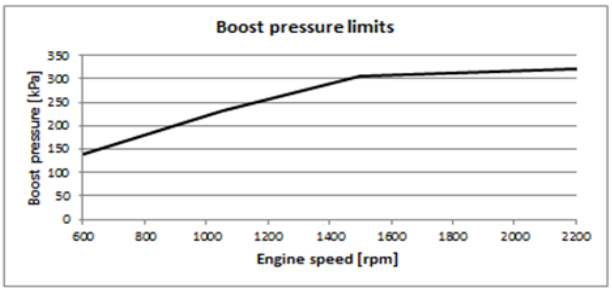

Electrical system

Voltage and type				24V
Alternator:	make			MELCO
	output	A		110/130
	tacho output	Hz/alternator rev.		
	drive ratio			
Starter motor:		make		MELCO
		type		85P50 / 90P55
		output	kW	5 / 5.5
			hp	6.8 / 7.5
Number of teeth on:		flywheel		137
		starter motor		10 / 12 teeth
Inlet manifold heater (at 20 V)			kW	4
Power relay for the manifold heater			A	200

Conditions:	**Temperature**	**°C**		**25**	**0**	**-15**
(5 mΩ main circuit resistance@	**Battery**	**Ah / CCA**		**100/700**	**100/700**	**100/700**
Crank speed		rpm		197	150	123
Crank current		A		173	265	320
Starter input power during crank		kW		3,90	4,70	5,20
Battery power during crank		kW		4,00	5,10	5,70
Min battery @ 0°C		Ah / CCA				

Power take off			**rpm**	**1500**	**1800**	**2000**	**2200**
Front end in line with crank shaft max:*		0.02 kgm^2	Nm	866	817	750	610
Flywheel			lbf ft	639	611	546	451
SAE 2, STD 10” & 11,5 ”, 1.303 kgm2		0.03 kgm^2	Nm	866	748	711	457
			lbf ft	639	611	500	387
		0.04 kgm^2	Nm	866	695	645	399
			lbf ft	639	572	461	320
Front end belt pulley load.	Max up (above or equal to horizontal line)		kW	3,4	4,1	4,5	5,0
			hp	4,6	5,6	6,1	6,8
	Max down (below horizontal line)		kW	28,4	34,0	37,8	41,6
			hp	38,6	46,2	51,4	56,6
Maximum power on Rear PTO on top of flywheel housing (REPTO):*			kW	75			
			hp	102			
Speed ratio direction of rotation viewed from flywheel side				1:1 Counter clockwise			
Maximum torque on PTO at compressor position:*			Nm	200			
			lbf ft	148			
Speed ratio direction of rotation viewed from flywheel side				1.026:1 Counter clockwise			
Timing gear at hydraulic pump PTO max:*			Nm	80			
			lbf ft	59			
Speed ratio direction of rotation viewed from flywheel side				1.3:1 Clockwise			
Max allowed bending moment in flywheel housing		SAE2	Nm	4600			
			lbf ft	3393			
Max. rear main bearing load			N				
			lbf				

**** Maximum allowed torque at individual PTO´s.***
If more then one PTO output is used simultaniusly, calculations needs to be performed to determine available maximum.
Available torque depends on application inertia.

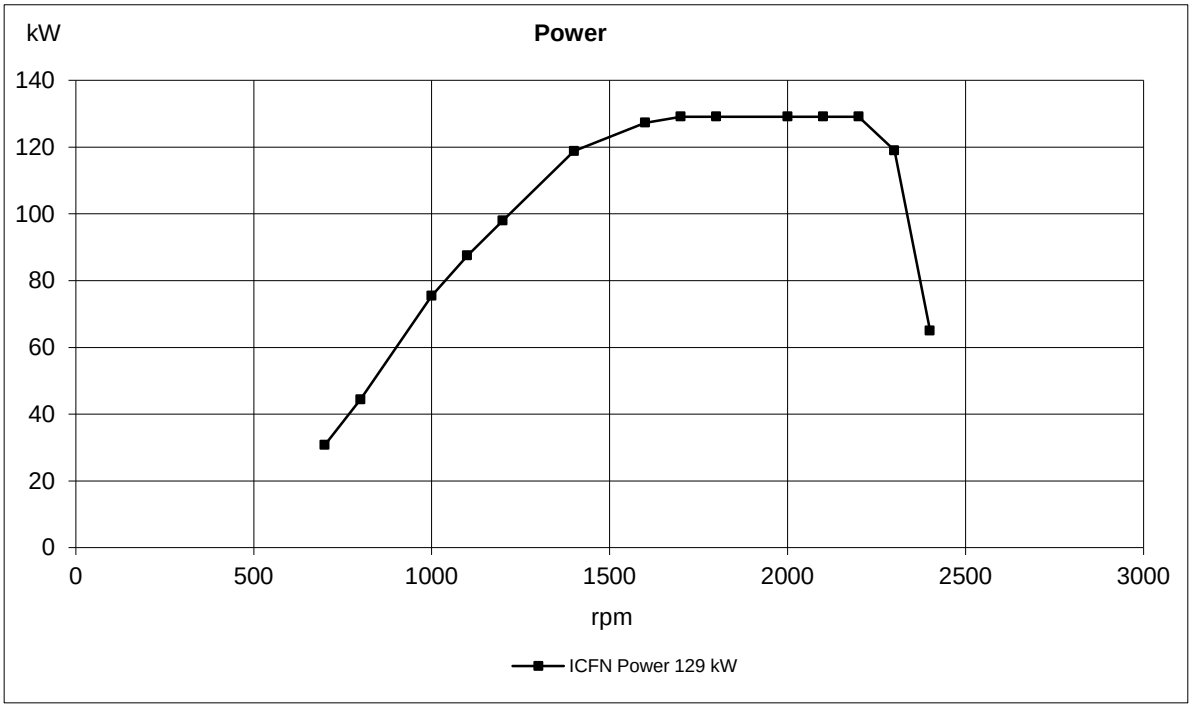
kW
Power
140
120
100
80
60
40
20
0
0
500
1000
1500
2000
2500
3000
rpm
ICFN Power 129 kW

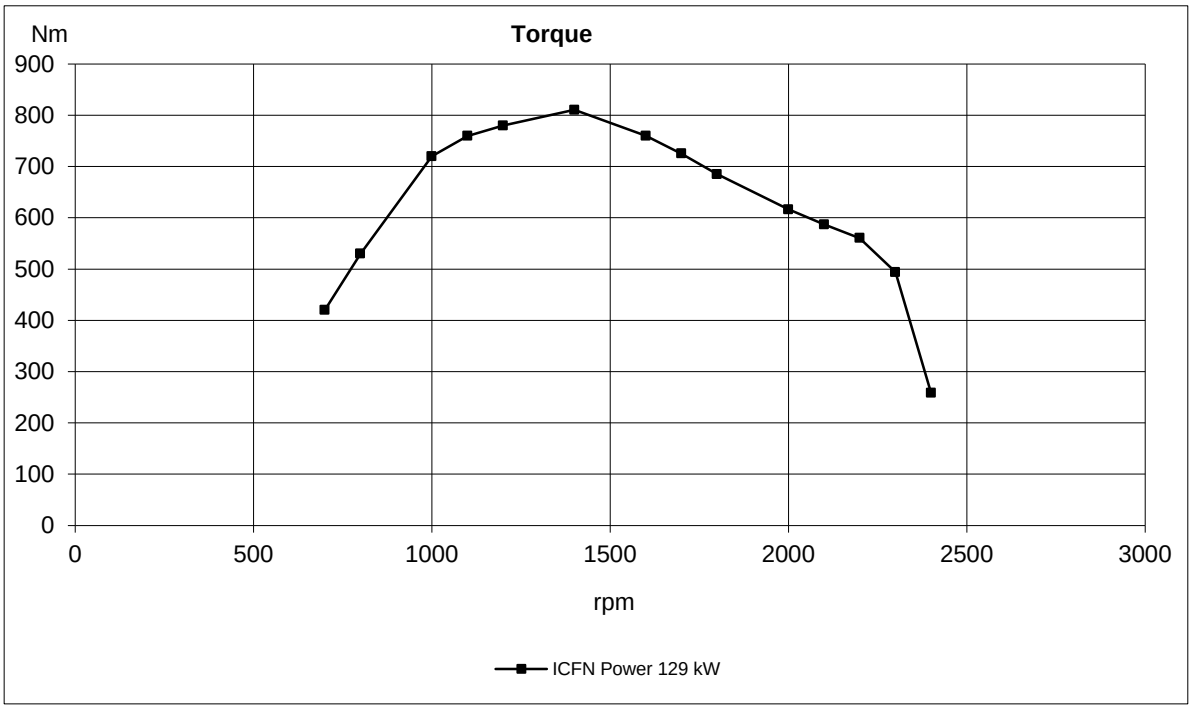
Nm
Torque
900
800
700
600
500
400
300
200
100
0
0
500
1000
1500
2000
2500
3000
rpm
ICFN Power 129 kW

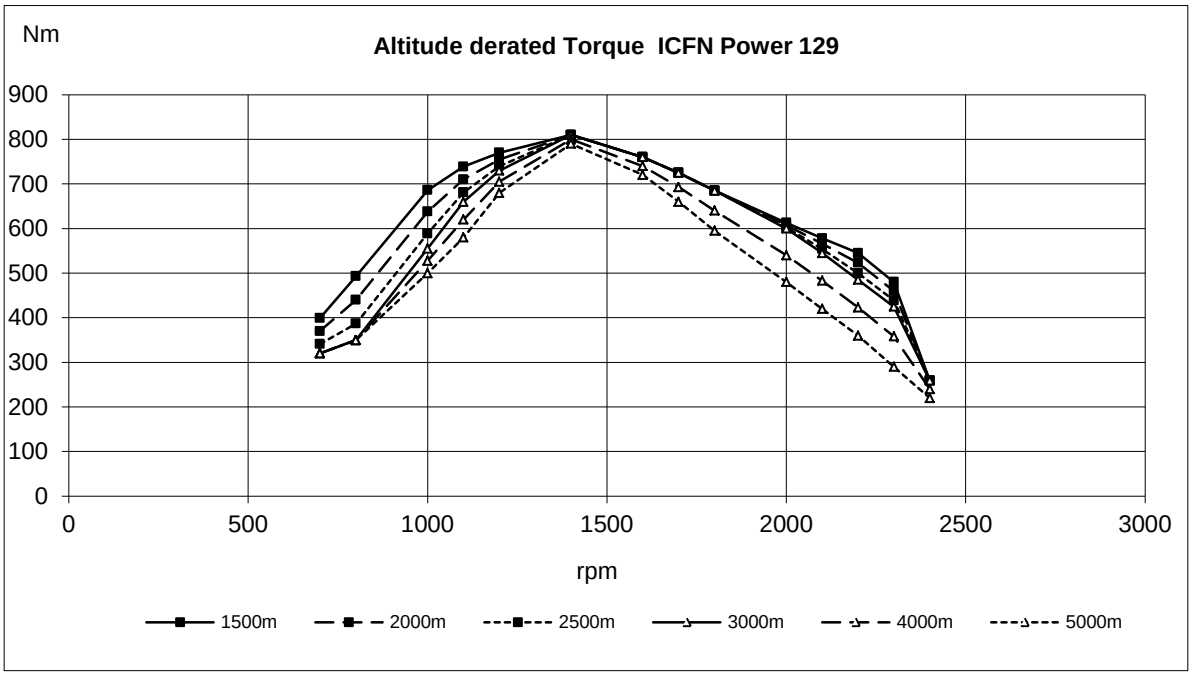
Nm
Altitude derated Torque ICFN Power 129
900
800
700
600
500
400
300
200
100
0
0
500
1000
1500
2000
2500
3000
rpm
1500m
2000m
2500m
3000m
4000m
5000m

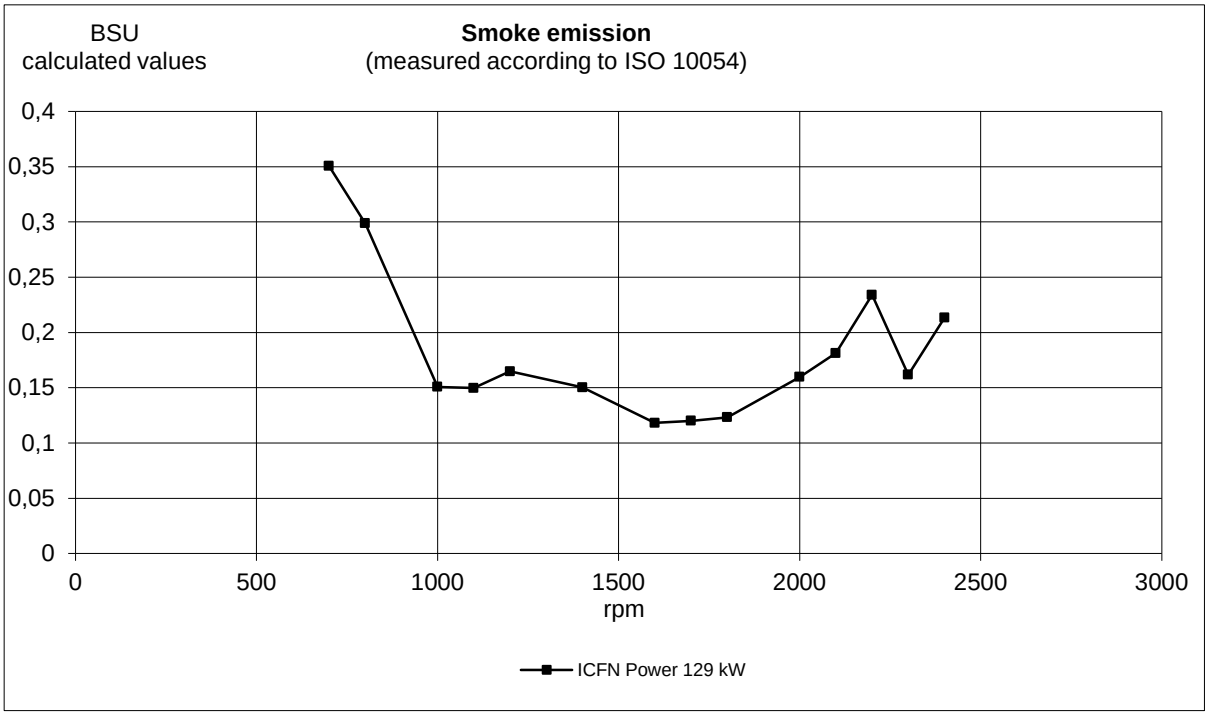
BSU
calculated values
Smoke emission
(measured according to ISO 10054)
0,4
0,35
0,3
0,25
0,2
0,15
0,1
0,05
0
0
500
1000
1500
2000
2500
3000
rpm
ICFN Power 129 kW

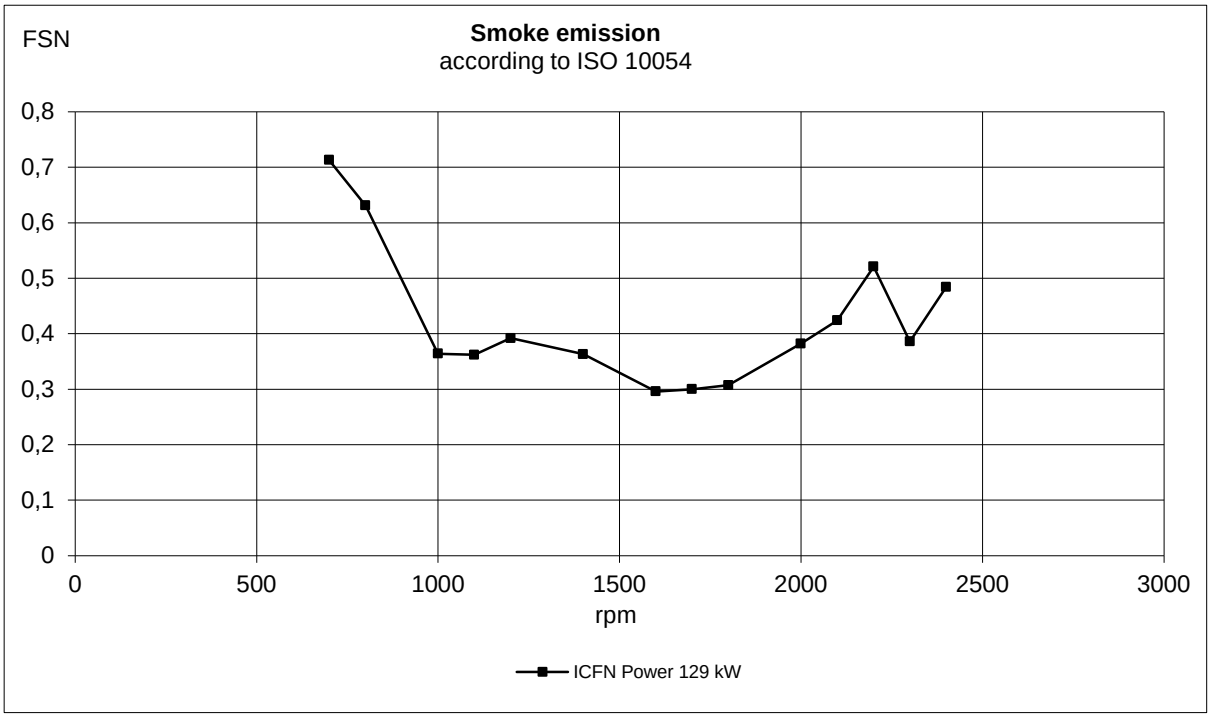
FSN
Smoke emission
according to ISO 10054
0,8
0,7
0,6
0,5
0,4
0,3
0,2
0,1
0
0
500
1000
1500
2000
2500
3000
rpm
ICFN Power 129 kW

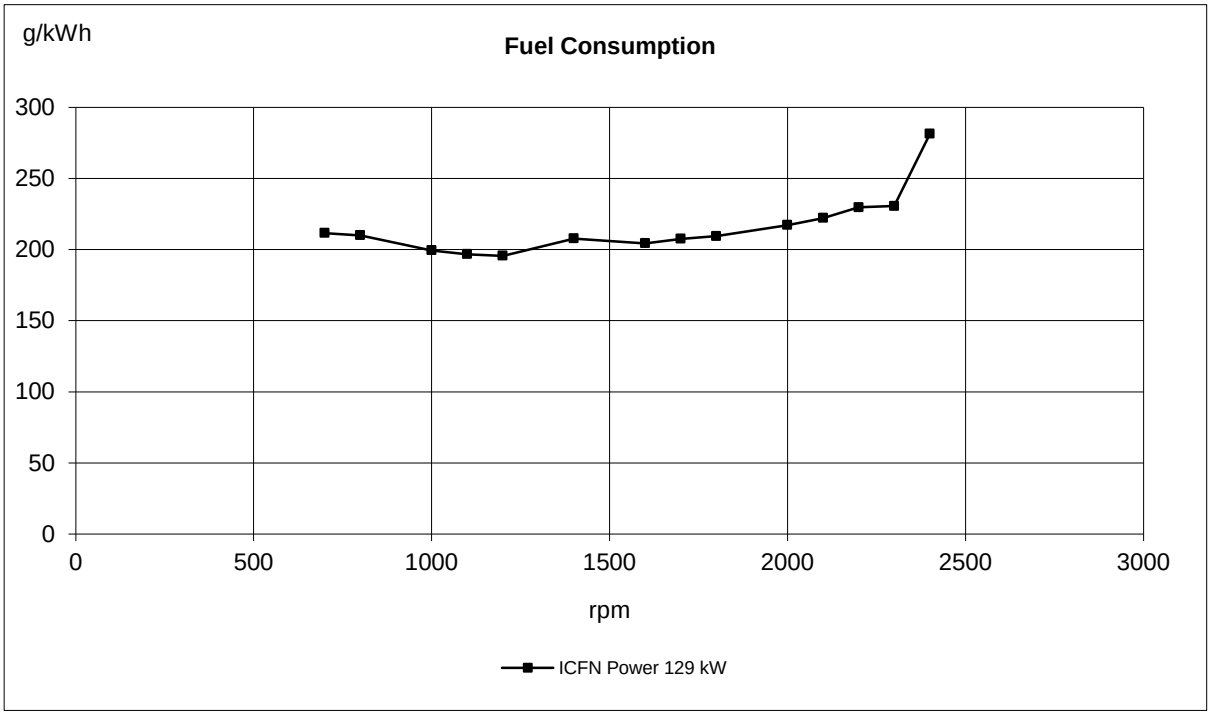
g/kWh
Fuel Consumption
300
250
200
150
100
50
0
0
500
1000
1500
2000
2500
3000
rpm
ICFN Power 129 kW

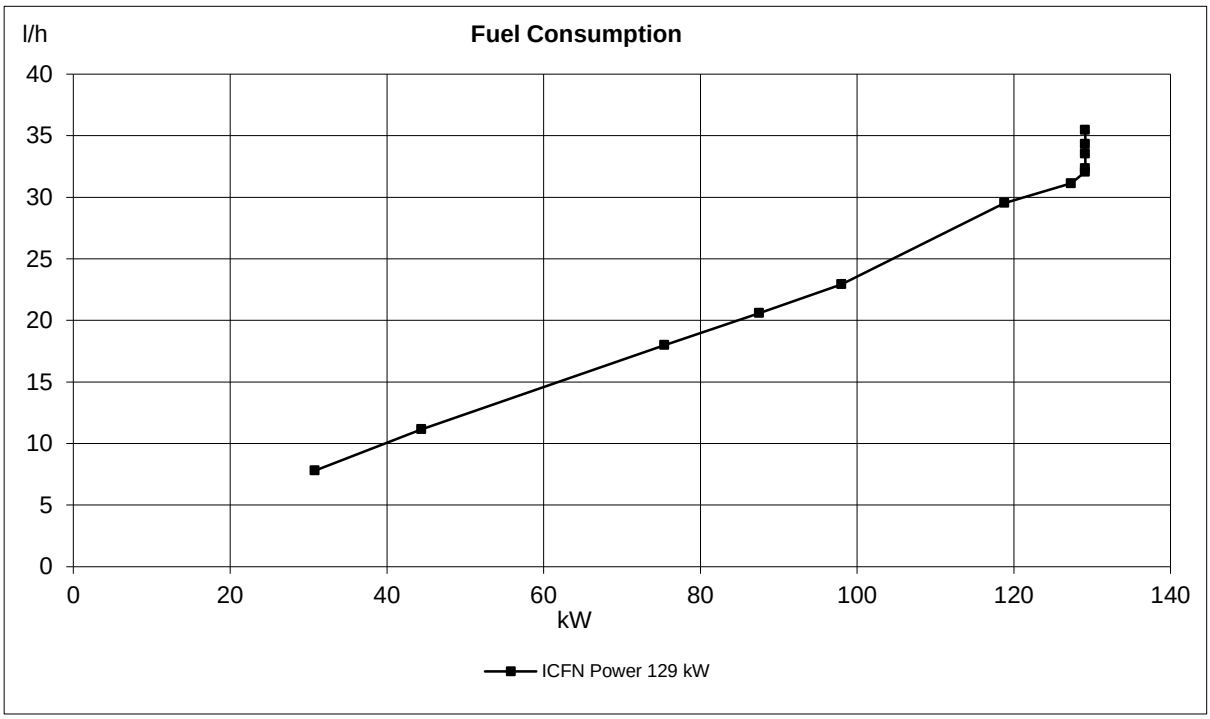
l/h
Fuel Consumption
40
35
30
25
20
15
10
5
0
0
20
40
60
80
100
120
140
kW
ICFN Power 129 kW

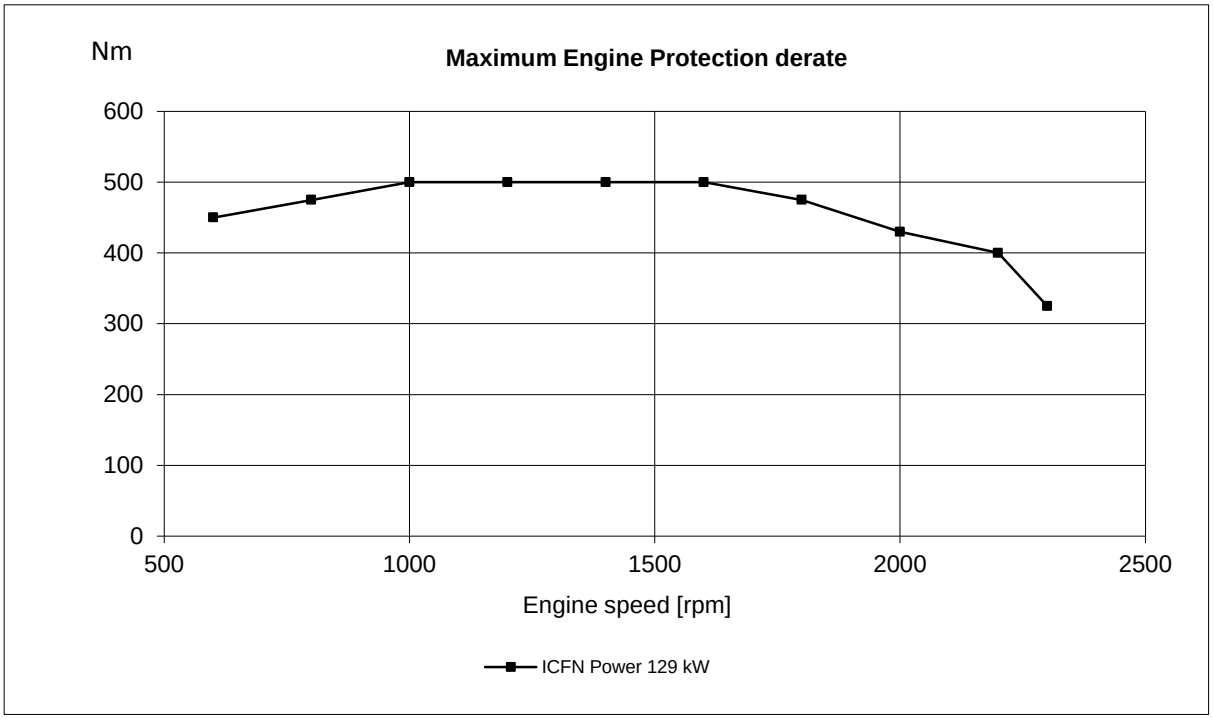
Nm
Maximum Engine Protection derate
600
500
400
300
200
100
0
500
1000
1500
2000
2500
Engine speed [rpm]
ICFN Power 129 kW

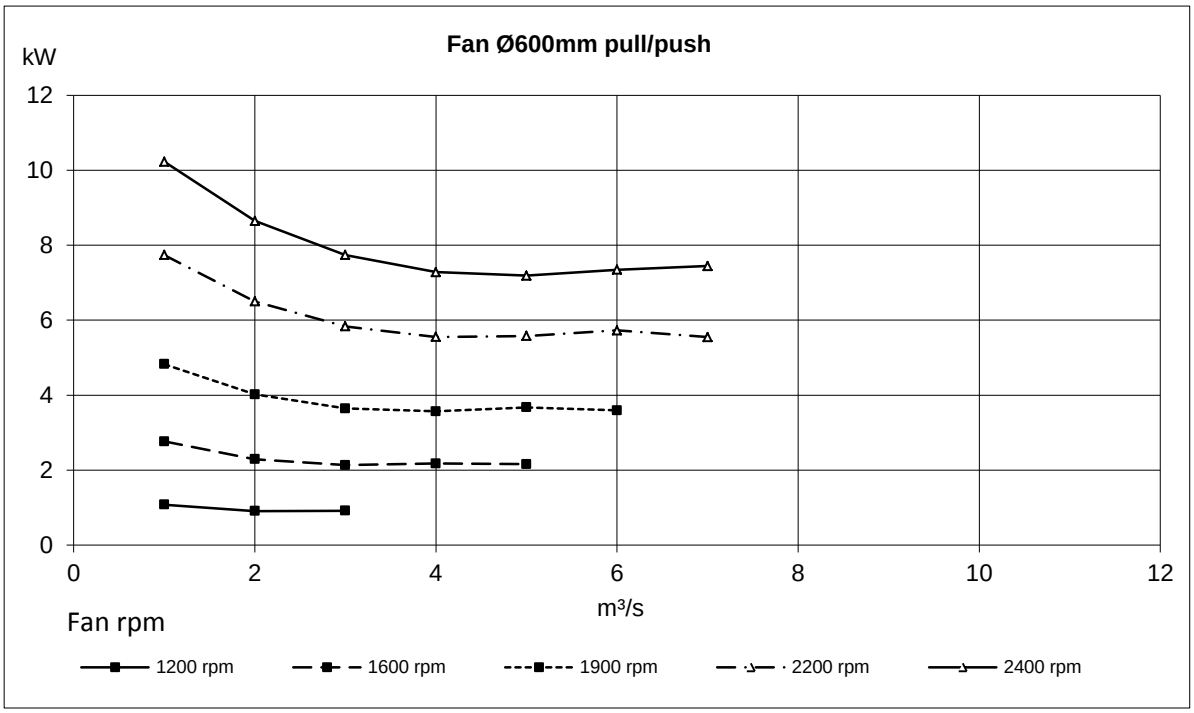

Maximum fan speed with visco clutch: 2400rpm

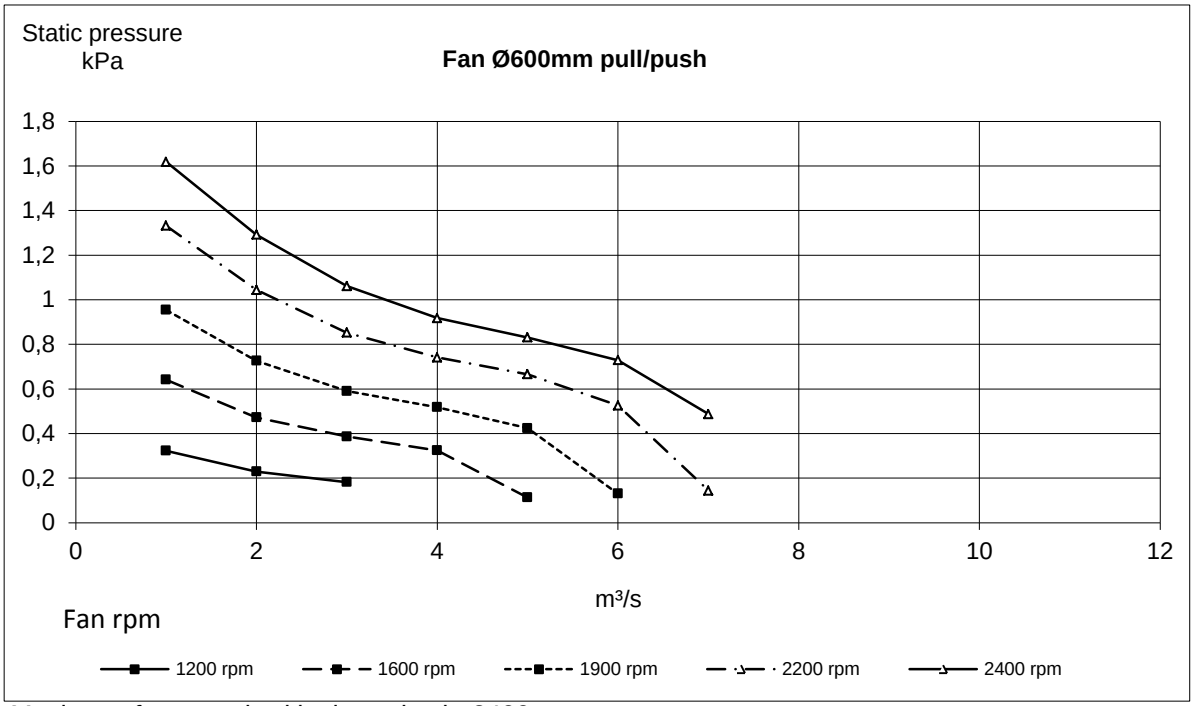

Maximum fan speed with visco clutch: 2400rpm

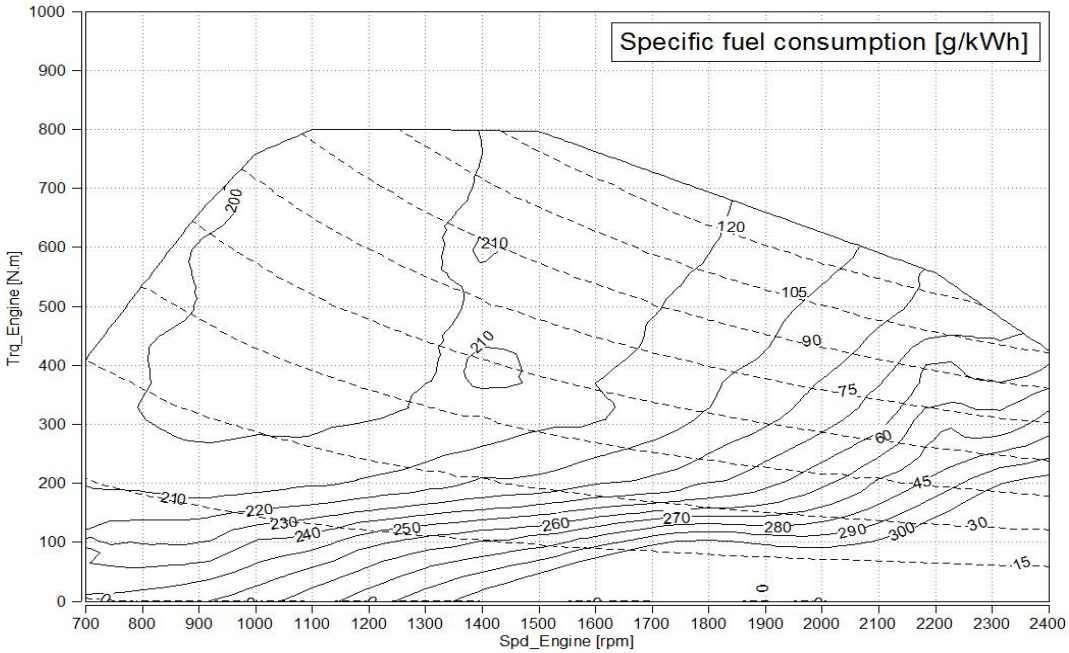
Specific fuel consumption [g/kWh]
Trq_Engine [N.m]
Spd_Engine [rpm]
200
210
210
120
105
90
75
60
45
30
15
210
220
230
240
250
260
270
280
290
300
0

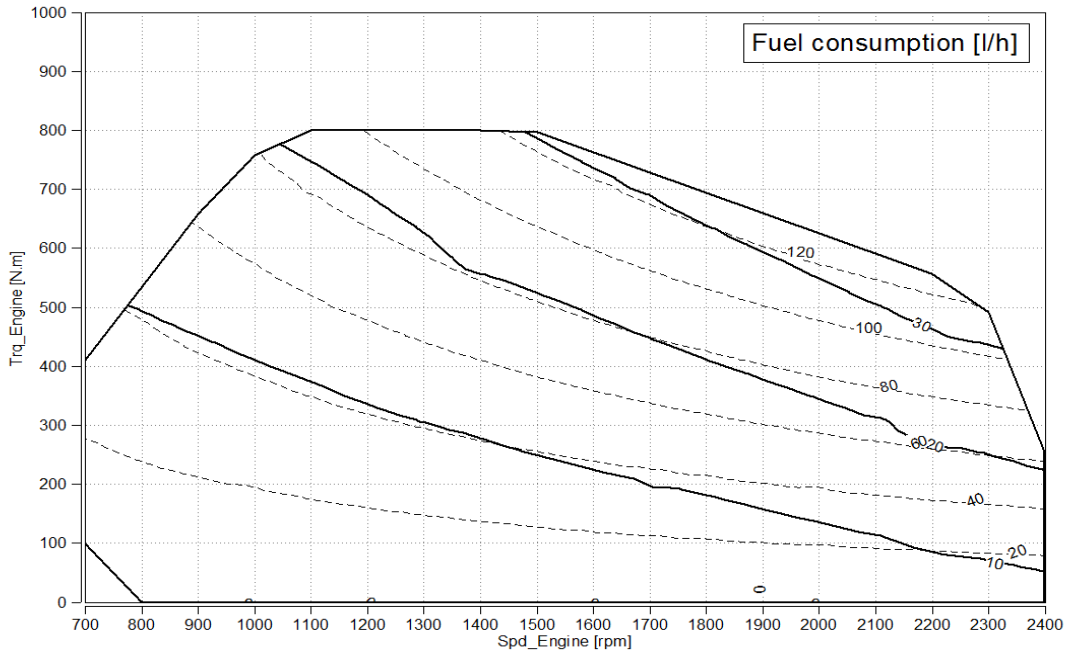
Fuel consumption [l/h]
Trq_Engine [N.m]
Spd_Engine [rpm]
120
100
80
60
40
20
30
20
10
0